IR FIXED LENS VANDAL-PROOF DOME CAMERA

DAI-480IPE28

IP SOLUTION 1.3MP

1.3MP | ICR | 0 Lux Minimum Illumination | ONVIF | D WDR | 3D-DNR | Motion Detection | 10M View | PoE | IP66 Protection Rating | Vandal Proof | DDNS | CMS | Internet Monitoring | Mobile

- 1/4" CMOS Sensor
- 1.3 Mega-Pixel
- True Day & Night (IR Cut Removable)
- 0 Lux (IR On) Min. Illumination
- ONVIF
- Digital WDR
- 3D Noise Reduction
- Motion Detection and Privacy Masking
- 2.8mm Mega-Pixel Lens
- 10m IR Illumination
- PoE Support
- IP 66 Protection
- Vandal-Proof

Specifications

		Model	DAI-480IPE28
Camera	Video	Image Sensor	1/4" CMOS
		Effective Pixels	1280×720
		Electronic Shutter	1/25s ~ 1/100000s
		Day & Night	ICR
		Min. Illumination	0lux (IR ON)
	Audio	Audio compression	No
		Communication	No
	Image Enhancement	Image Settings	AWB, AGC Adjustable Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		WDR Range	Digital WDR
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
		Motion Detection	Yes
Compression		Video Compression	H.264
		Resolution	720P（1280×720）,D1 (704×567) ,CIF (480x240)
		Multi-stream	1280x720（1~30fps） D1（1~30fps）/ CIF（1~30fps）
		Bit rate	64Kbps ~ 4Mbps
		Encode Mode	VBR/CBR
		Image Quality	Five levels under VBR; Free adjustment under CBR

Housing	IR Distance	10m (24 IR LED)
	Lens	2.8mm
	Iris	Fixed Iris
	Lens Mount	Φ12 mount
	Water-proof	IP66
	Bracket	3-Axis Gimbal
	Dimensions	Φ116mm×91mm
	Weight(gross)	592g
Connectivity	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	No
	Mic Connectivity	No
	SD Card	No
	RS485	No
	Alarm	No
Network	Remote Monitoring	IE Browsing, CMS 2.0 Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
	Ethernet	100Mbps
	PoE	Yes
Others	Power Supply	DC12V/PoE
	Work Environment	-10℃~50℃, 10%~90% Humidity

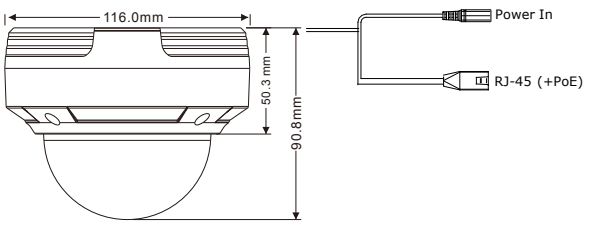



3-Axis Mechanism